KOOB®

Dimmable:
0.1%-100%

DALI 2

LED Intelligent Driver (CV)

- Dimming range: 0~100%, LED start at 0.1% possible.
- 0-100% flicker-free, High frequency exemption level.
- Dimming interfaces: DALI-2, Push DIM,0-10V,1-10V, 10V PWM,RESISTANCE DIM
- High Efficient driver: PF>0.96, THD<10%
- Over load / Over temp. / Short circuit / Over voltage protection, recover automatically.
- Suitable for internal lights application for Ⅰ/Ⅱ/Ⅲ.
- Up to 50000-hour life time.



0-10V
1-10V
10V PWM
Resistance DIM
DALI-2
PUSH DIM

PF>0.96

THD<10%

Flicker-free
IEEE 1789
High frequency exemption level

SELV IP20


0-10V 1-10V DIM | PWM Digital Dimming | Resistance DIM | 0.1% Depth Dimming | DALI Push DIM | Over-heat Protection | Short Circuit Protection | Over Load Protection | V Over voltage protection

Specification

Model		YSD-100WUDL-12D	YSD-100WUDL-24D	YSD-100WUDL-36D	YSD-100WUDL-48D
OUTPUT	Output voltage	12VDC	24VDC	36VDC	48VDC
	Output voltage range	12VDC±0.3VDC	24VDC±0.6VDC	36VDC±0.6VDC	48VDC±0.6VDC
	Output current	Max 8.3A	Max 4.2A	Max 2.78A	Max 2.1A
	Output power	Max 100W			
	Output power range	0~100W			
	With or without strobe	No strobe			
	Dimming range	0~100%, dimming depth: Max. 0. 1%			
	Ripple & Noise	≤150mV	≤240mV	≤360mV	≤480mV
	PWM frequency	4-16Khz			
INPUT	Dimming interface	DALI-2 /PUSH DIM/0-10V/1-10V/10V PWM/RESISTANCE DIM(0-100K)			
	Input voltage	100-264Vac			
	Frequency	50/60Hz			
	Input current	1.2~0.4A			
	Power factor	PF>0.96/230Vac, at full load			
	THD	≤10% at 230Vac, at full load			
	Efficiency (typ.)	90%	90%	90%	90%
	Inrush current(typ.)	Cold start 50A at 230Vac			
	Control surge capability	L-N:1KV			
	Leakage current	Max. 0.5mA			
ENVIRONMENT	Working temperature	ta: -25°C ~ 50°C tc: 90°C			
	Working humidity	20 ~ 95%RH, non-condensing			
	Storage temp., humidity	-40°C ~ 80°C, 10~95%RH			
	Vibration	10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.			
PROTECTION	Overtemperature	Protection type:Shut down o/p voltage,re--power on to recover			
	Over voltage protection	The no-load voltage is greater than 120%~150% rated output voltage.Shut down the output and It can be automatically restored after the fault is eliminated ,			
	Short circuit protection	Protection type: 1. When the first level short-circuit protection is triggered, the fault will recover automatically after 3 seconds. 2. When the second-level short-circuit protection is triggered, the power needs to be turned on again after the fault is eliminated			
SAFETY & EMC	Withstand voltage	I/P-O/P: 3750Vac			
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	Safety standards	IEC/EN61347-1, IEC/EN61347-2-13			
	EMC emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3			
	EMC immunity	EN61000-4-2,3,4,5,6,8,11 EN61547			
	Strobe test standard	IEEE 1789			


Dimensions

Unit: mm

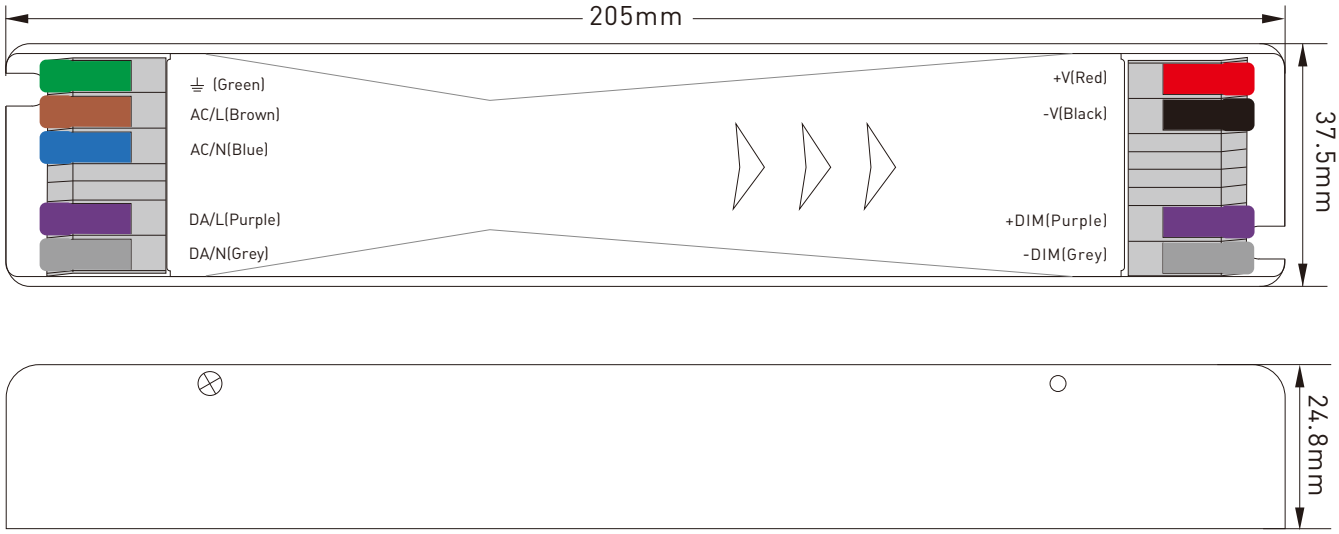


Wiring diagram

DALIConnection Mode

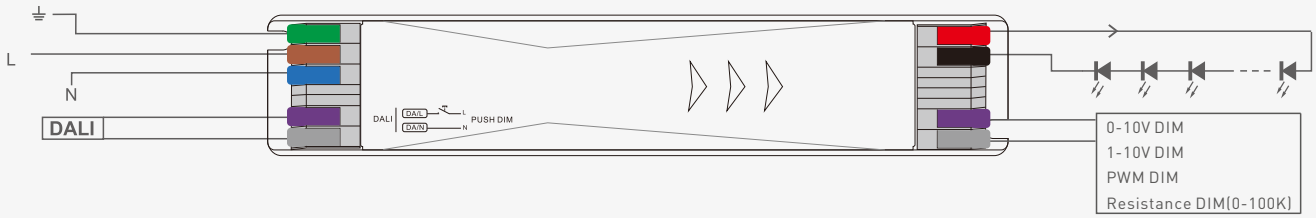

PUSH DIMConnection Mode

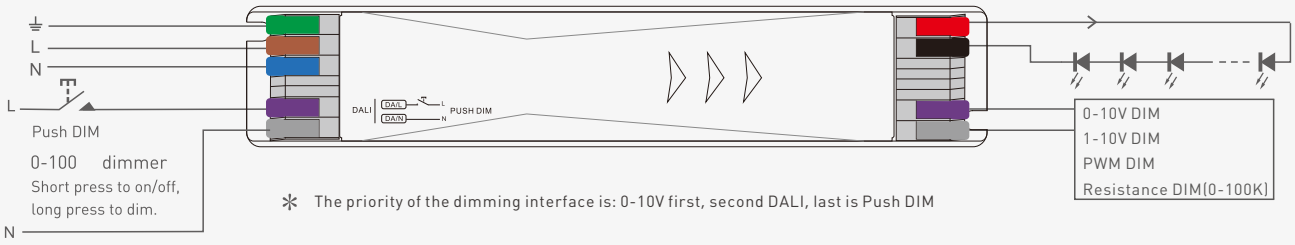

✻ The priority of the dimming interface is: 0-10V first, second DALI, last is Push DIM

Push DIM



Reset switch

On/off control: Short press.


Stepless dimming: Long press.

With every other long press, the brightness level goes to the opposite direction.


Dimming memory: Go to the brightness level adjusted previously when lights are turned on.

KOOB®


Relationship diagrams

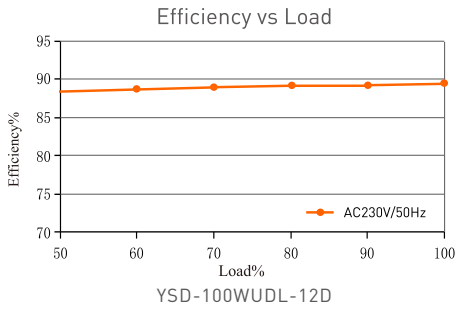


YSD-100WUDL-12D

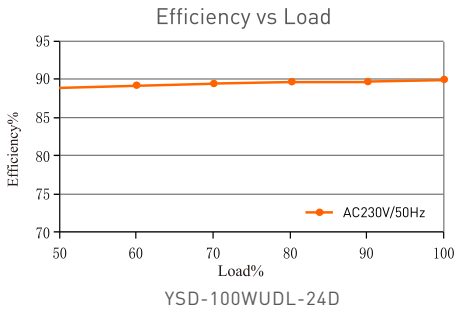

YSD-100WUDL-24D

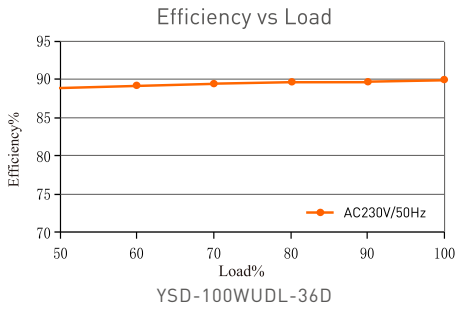

YSD-100WUDL-36D

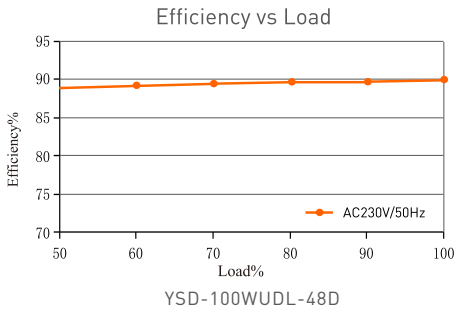


YSD-100WUDL-48D

Packaging Information

DIMENSION	205x37.5x24.8mm(LxWxH)
PACKING	213x44x33mm(LxWxH)
CARTON QUANTITY	50PCS
CARTON SIZE	482x225x180mm(LxWxH)
WEIGHT	245g±10gPCS

Temperature load curve

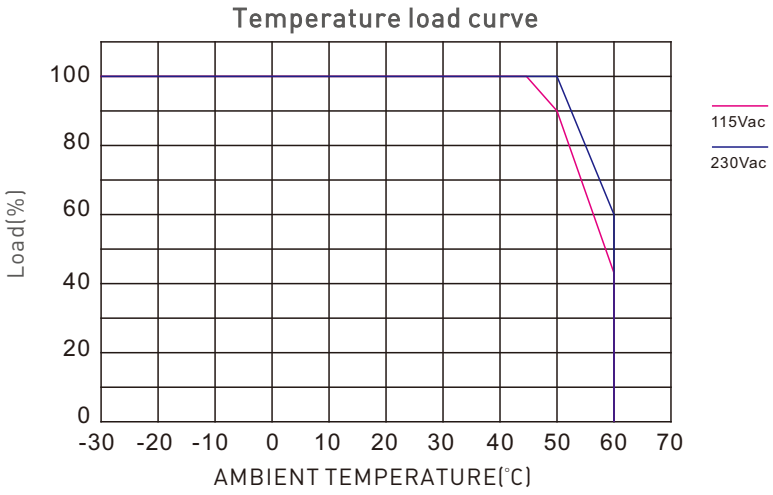


Flicker Test Form

IEEE 1789

Limit of Modulation in low risk area	
Waveform frequency of Optical output	limit (%)
$f \leq 8Hz$	0.2
$8Hz < f \leq 90Hz$	$0.025 \times f$
$90Hz < f \leq 1250Hz$	$0.08 \times f$
$f > 1250Hz$	Exemption assessment
Limit of Modulation in no effect area	
Waveform frequency of Optical output	limit (%)
$f \leq 10Hz$	0.1
$10Hz < f \leq 90Hz$	$0.01 \times f$
$90Hz < f \leq 3125Hz$	$(0.08/2.5) \times f$
$f > 3125Hz$	Exemption assessment (High frequency exemption)

Brightness

1%
5%
10%
20%
30%
40%
50%
60%
70%
80%
90%
100%

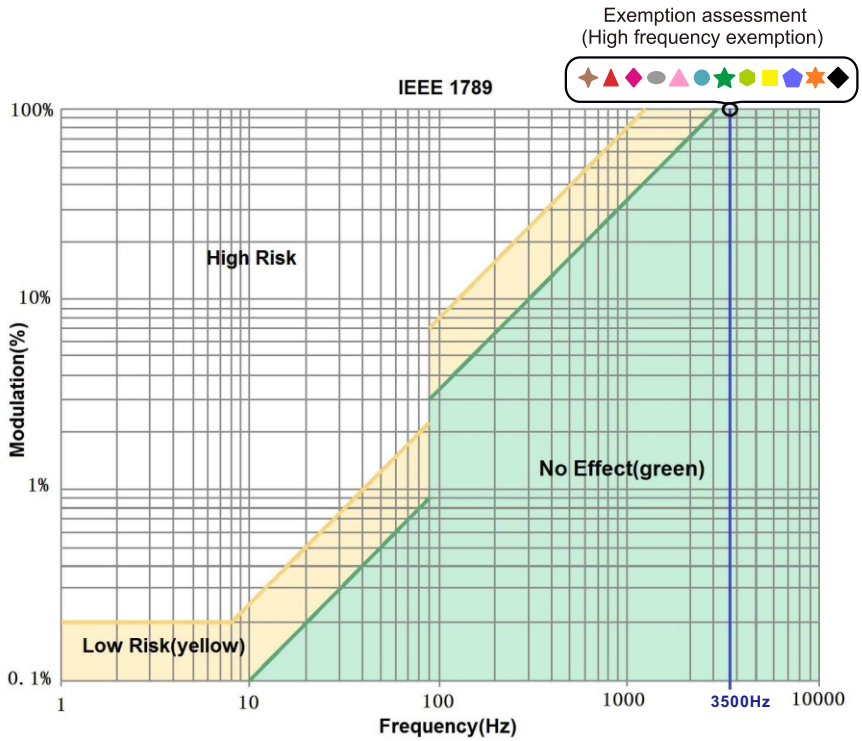

* No further notice if any changes in the manual. Product function depends on the goods. Please feel free to contact your supplier if any question.