


LD1051832 (Horizontal hoisting)
Installation Steps




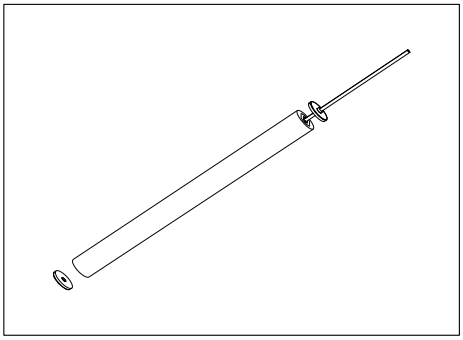


1 Product picture

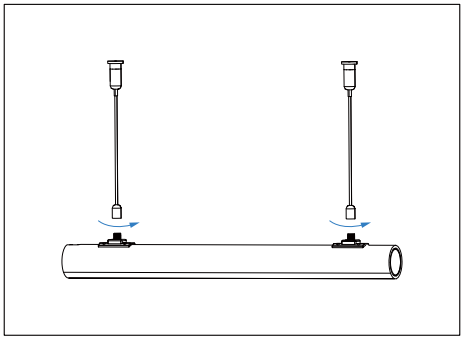


2 Spin to the limit

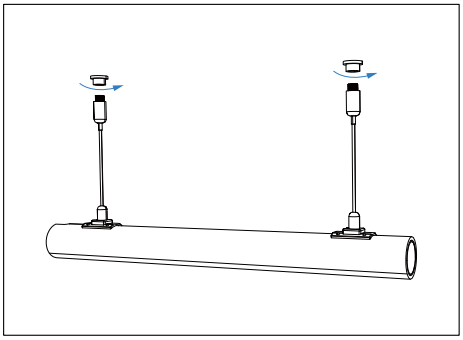


3 Take apart the head of wire locker

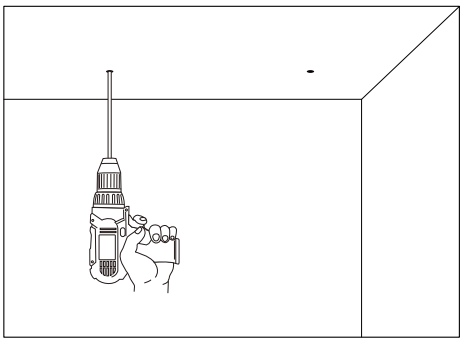


4 Drill in specific mounting placement

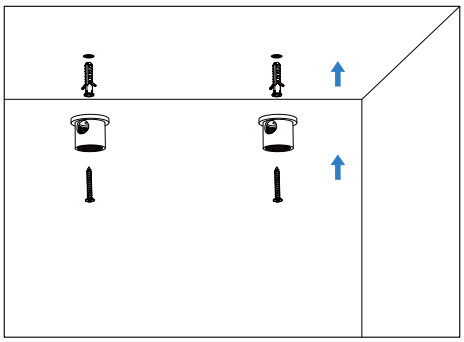


5 Fix the separate wire locker in ceiling

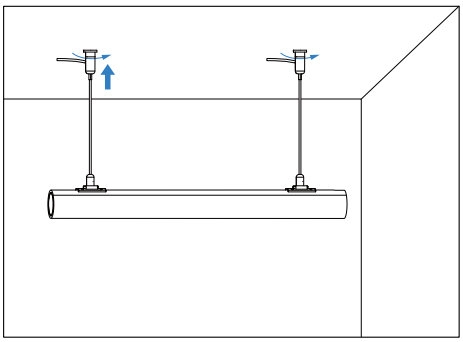


6 Spin upwards to the limit

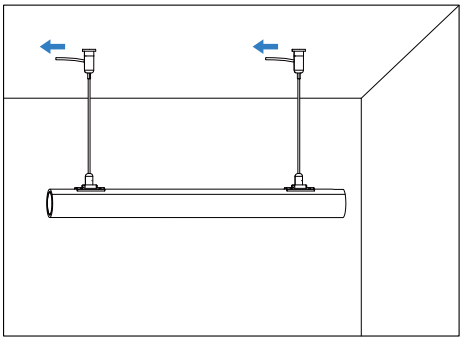


7 Pull the steel rope to adjust the height

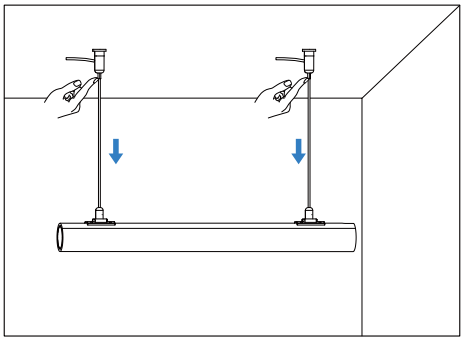


8 Press the elastic head and pull downwards to readjust the height

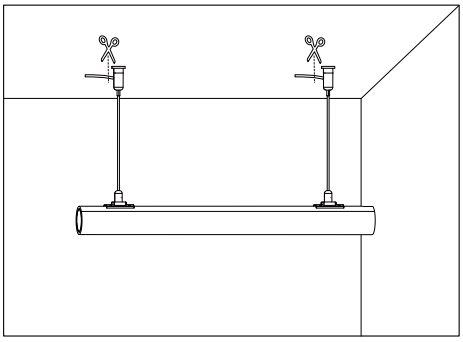

9 Cut off the exposed steel rope

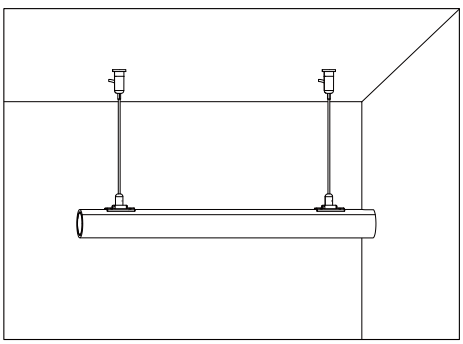

10 Picture of finished product after installation

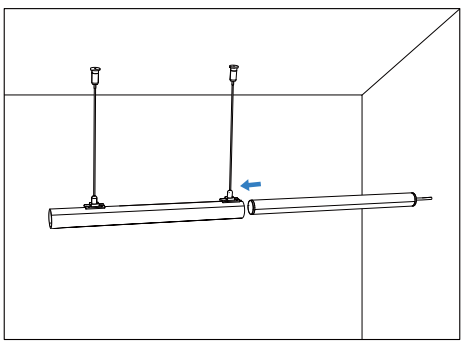

11 Put the tube into finished accessories

