## Installation

### Surface Mounting

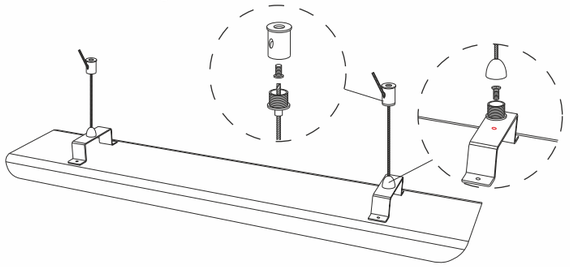

### Hanging Mounted

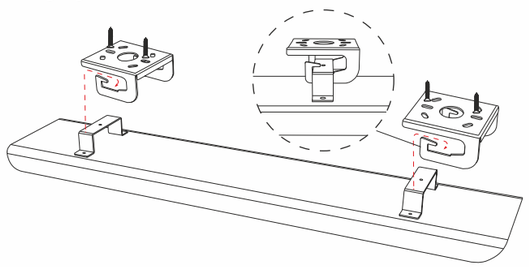

## Dimension

### 75W




### 150W




### 200W




## Packing Parameters

| Power | Inbox Dimmension | QTY/CTN | Dimmension | Net Weight/PC |
|---|---|---|---|---|
| 75W | 605x150x75mm | 6 | 63x32x24.5cm | IP20: 2730g / IP65: 2900 |
| 150W | 1180x150x75mm | 3 | 120x17x24.5cm | IP20: 4600g / IP65: 5430 |
| 200W | 1468x150x75mm | 2 | 150x17x17cm | IP20: 5500g / IP65: 6490 |

LEDBOX®

www.ledbox.es

LEDBOX®

# HIGH POWER

## LED HIGH BAY LIGHTS

LD1160638-39-40-41-42-43

IP20 IP65



## Application Places

Suitable For Factories,Warehouses,
Supermarkets,Shops And Other
Places That Needs High Power
Lighting Lamps

## In Developing

Sensor, Emergency

## Product Features

SMD 2835 Chips, High Luminous Flux, 100lm/W
LED QTY: 75W 250pcs/150W 500pcs/200W 660pcs
Thicken Iron body, better heat dissipation
Body Material: Iron+PC
Big power with small size, fashion design
0.6m=75W/1.2m=150W/1.5m=200W
Hanging Mounted/Surface Mounting, Different kinds
of installations, suit different places
Constant Current LED Driver,
Power: 75W/150W/200W
Input Voltage: AC 100-240V ~ 50/60Hz
PF>0.9 IP65/IP20
Ta: 60°C Tc: 90°C

Black Gray White

***Warranty***

**5years**

# HIGH POWER LED HIGH BAY LIGHTS

**Model: SEC-L-GD120**

**Warranty**
**5years**

IP65

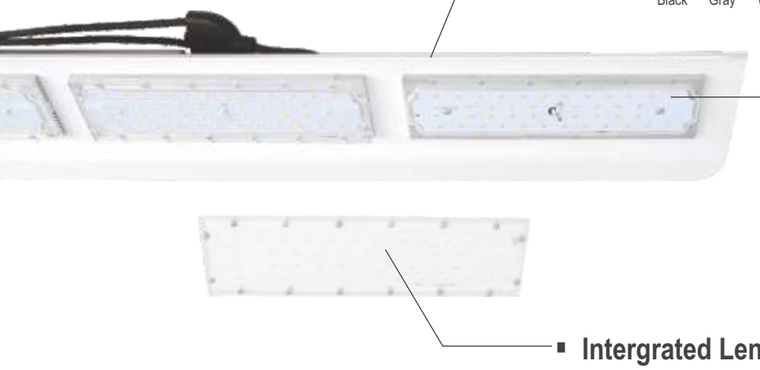

## Shell Material

Body Material: Iron+PC

Black Gray White

## LED Chips

SMD 2835 Chips
High Luminous Flux, 100lm/W
LED QTY: 75W 250pcs
150W 500pcs/200W 660pcs

Waterproof ring



## Intergrated Lens

(Beam Angle Can Be Customized)

IP20




## In Developing

Sensor, Emergency

## Constant Current LED Driver

Power: 75W/150W/200W
Input Voltage: AC 100-265V ~ 50/60Hz
PF>0.9 IP65/IP20
Ta: 60°C Tc: 90°C

IP20

IP65



## Installation







## Accessories

### Hanging Mounted Parts



### Surface Mounting Parts



## Product Features

SMD 2835 Chips, High Luminous Flux, 100lm/W
LED QTY: 75W 250pcs/150W 500pcs/200W 660pcs
Thicken Iron Body, Better Heat Dissipation
Body Material: Iron+PC
Big Power With Small Size, Fashion Design
0.6m=75W/1.2m=150W/1.5m=200W
Hanging Mounted/Surface Mounting, Different Kinds Of Installations, Suit Different Places
Constant Current LED Driver, Power: 75W/150W/200W
Input Voltage: AC 100-240V ~ 50/60Hz PF>0.9 IP65/IP20 Ta: 60°C Tc: 90°C

LEDBOX®

## Application Places

Suitable for Factories,Warehouses,
Supermarkets,Shops and Other
Places That Needs High Power
Lighting Lamps

## LED Driver

| Power | Driver Specification | | | Eaglerise | Meanswell | Invertronics | Philps | Shining |
|---|---|---|---|---|---|---|---|---|
| | Input Voltage | Output Voltage | Output Current | | | | | |
| 75W | AC 100-265V | DC 45V | 1.45A | ESL075C1750MXLN3P | ELG-75 | EUB-075S175SV | Xitanium 929001404580 | BSY-FS1500I070C |
| 150W | AC 100-265V | DC 45V | 2.9A | ESL150C3500MXLN3P | ELG-150 | EUB-150S350SV | Xitanium 929001404480 | BSY-FS3000I140 |
| 200W | AC 100-265V | DC 45V | 3.9A | ESL200C5600MXLN3P | ELG-200 | EUB-200S560SV | Xitanium 929001404680 | BSY-FS3900I182 |

## IES

75W




150W




200W




AV










## Parameters

**Model: SEC-L-GD120**

| Power | Input Voltage | Body Material | CCT | PF | CRI(RA>) | Luminous Flux | LED QTY | IP Rate | Beam Angle | Life Time | Product Size |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 75W | AC 100-240V | Iron+PC | 4000K/6500K | >0.9 | 80 | 7500lm | 250pcs SMD 2835 | IP20/IP65 | 90° | 50000H | 600x145x47mm |
| 150W | AC 100-240V | Iron+PC | 4000K/6500K | >0.9 | 80 | 15000lm | 500pcs SMD 2835 | IP20/IP65 | 90° | 50000H | 1172x145x47mm |
| 200W | AC 100-240V | Iron+PC | 4000K/6500K | >0.9 | 80 | 20000lm | 660pcs SMD 2835 | IP20/IP65 | 90° | 50000H | 1472x145x47mm |