LEDBOX

www.ledbox.es



Free Cut Linear Lighting Series

Seamless connection | detachable connection

Product specification

Specification

Model	Voltage	Watt	Lumen	CRI	Color Temperature	Model of LED Beads	Length (including endcaps)	Package
A1410 -1000	12VDC	8W/M	340	>80	3000K/ 4000K/ 6500K	2216	1004mm	A light bar. one end caps. Two mounting clips. A power connector (wire length 2m). Frosted PC Cover.
			355					
			350					
A1410-1000	24VDC	8W/M	340					
			355					
			350					

Accessories

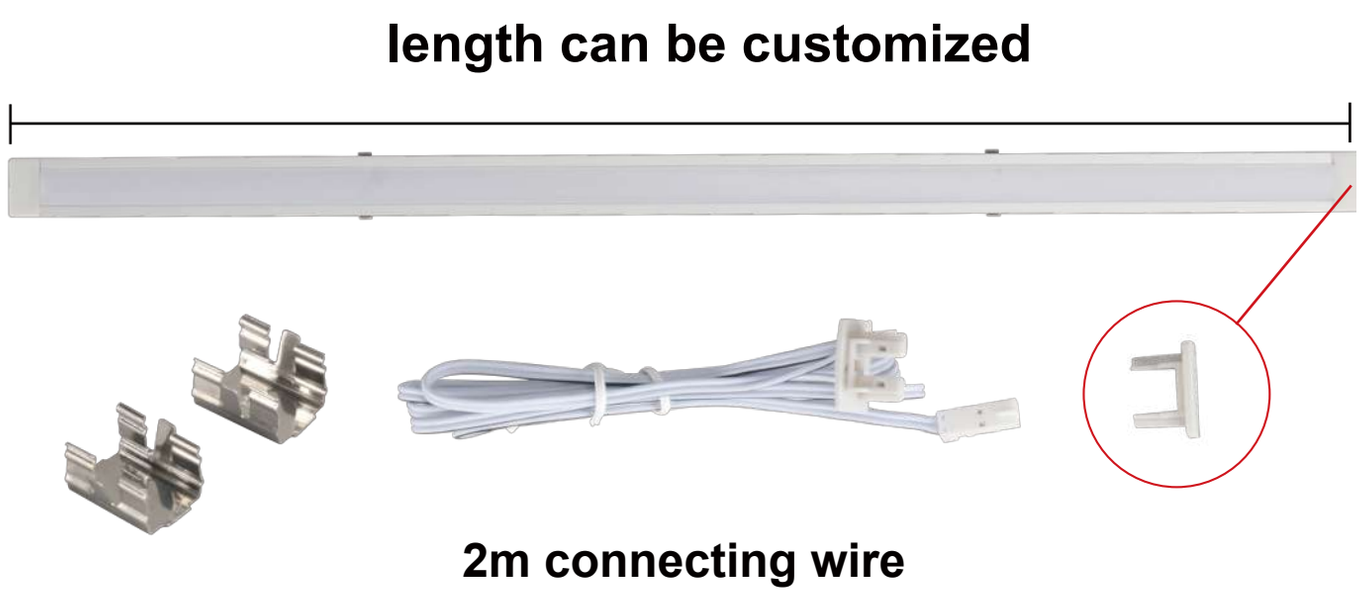









Product Features

• The LED Light is easy to install to wardrobe or shelf with mounting clip accessories. New design with separation of light bar and power wire, easy to install, remove and replace. With modern design, it is suitable for cabinet / furniture / room / ceiling hanging lighting etc. Substantial aluminum mass provide good heat sink for high power leds. It's perfect for seamless connection, no dark space.



Structure & Spec.

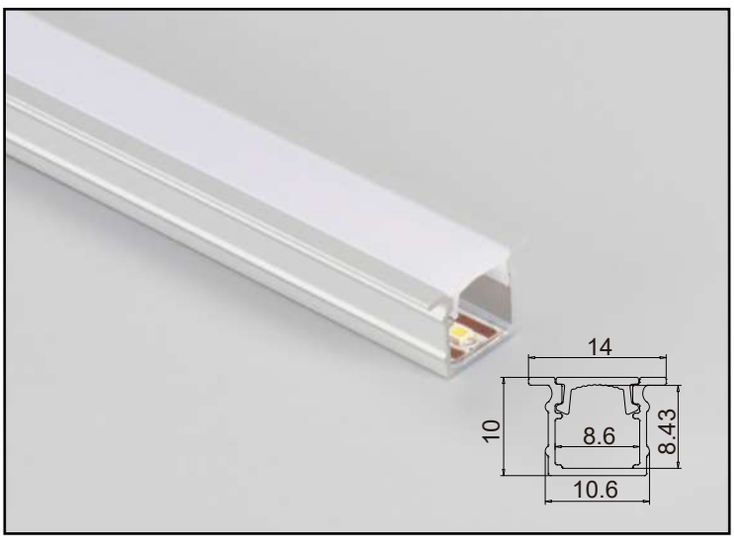

Model	LD1057062-70
Size (mm)	14*10.6
Material	6063 T5 Aluminum Alloy
Finish	Aluminum Anodized
Color	Silver
Lighting direction	Front luminous
Installation	Recessed Mounting
Color Temperture	3000K/ 4000K/ 6500K
Voltage	DC12V
Power(W/PC)	8W/M
Power output contact	Shot Contact
CRI (RA)	>80

How to install

1. Horizontal installation

2. vertical installation

The slotting dimension is 11mm wide and the depth is 10 mm

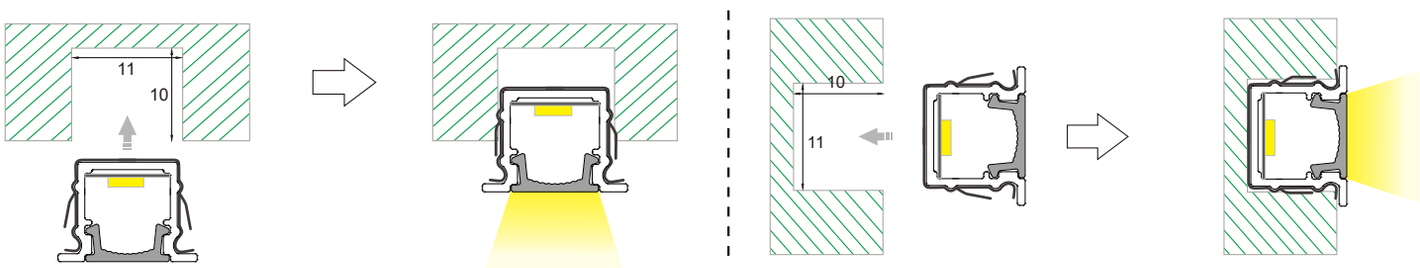

relative intensity

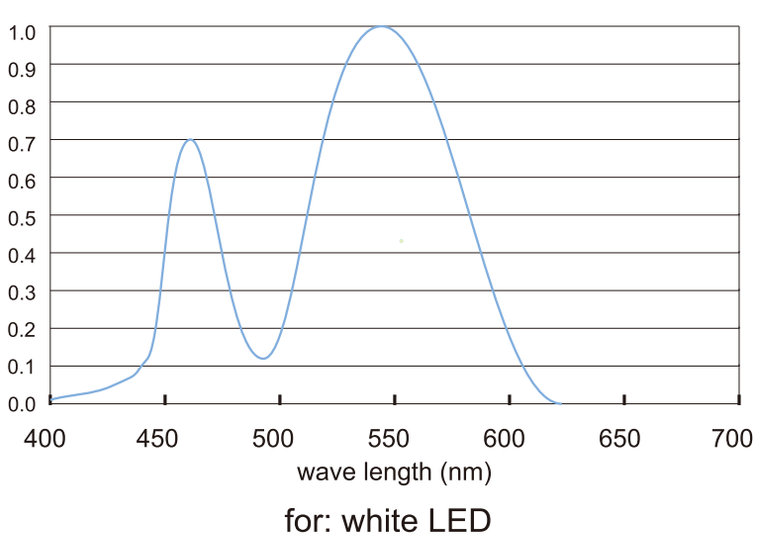

for: white LED

Radiation diagram

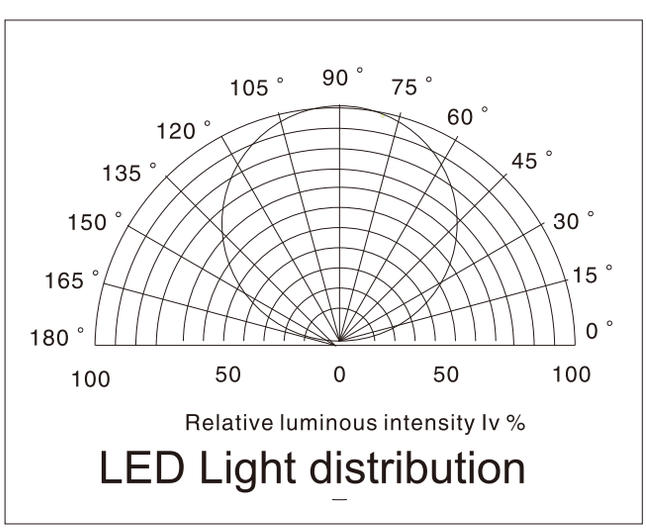

LED Light distribution

installation procedure




